


## QPL MIL-PRF-55342 Qualified Thin Film Resistor Chips

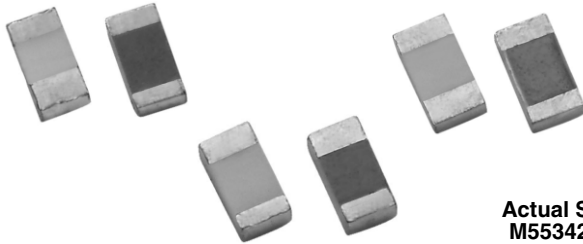


Actual Size  
M55342/02

Thin Film Mil chip resistors feature all sputtered wraparound termination for excellent adhesion and dimensional uniformity. They are ideal in applications requiring stringent performance requirements. Established reliability is assured through 100 % screening and extensive environmental lot testing. Wafer is sawed producing exact dimensions and clean, straight edges.

**NOTE:** Specification changed by DSCC from MIL-R-55342 to MIL-PRF-55342.

### CONSTRUCTION

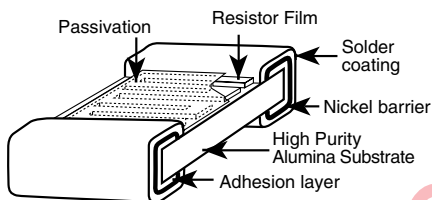

### FEATURES

- Established reliability, "R" failure rate level
- High purity alumina substrate for high power ( $\pm 25$  ppm/ $^{\circ}$ C, 0.1 ppm/ $^{\circ}$ C)
- Wraparound termination featuring a tenacious adhesion layer covered with an electroplated nickel barrier layer for + 150  $^{\circ}$ C operating conditions
- Very low noise and voltage coefficient ( $\pm 25$  ppm/ $^{\circ}$ C, 0.1 ppm/ $^{\circ}$ C)
- Non-inductive
- Laser-trimmed tolerances  $\pm 0.1$  %
- Wraparound resistance less than 0.010 ohms typical
- In-lot tracking less than 5 ppm/ $^{\circ}$ C
- Complete MIL-testing available in-house
- Antistatic waffle pack or tape and reel packaging available

### TYPICAL PERFORMANCE

	ABS
TCR	25
TOL	0.1

### STANDARD ELECTRICAL SPECIFICATIONS

TEST	SPECIFICATIONS	CONDITIONS
<b>MATERIAL</b>	<b>TAMELOX</b>	
<b>Absolute TCR</b>	$\pm 25$ ppm/ $^{\circ}$ C to $\pm 100$ ppm/ $^{\circ}$ C	- 55 $^{\circ}$ C to + 125 $^{\circ}$ C
<b>Absolute Tolerance</b>	$\pm 0.1$ %	+ 25 $^{\circ}$ C
<b>Stability: <math>\Delta</math>R Absolute</b>	$\pm 0.1$ %	2000 hrs. at + 70 $^{\circ}$ C
<b>Voltage Coefficient</b>	$\pm 0.5$ ppm/Volt	
<b>Operating Temperature Range</b>	- 55 $^{\circ}$ C to + 125 $^{\circ}$ C	
<b>Storage Temperature Range</b>	- 55 $^{\circ}$ C to + 150 $^{\circ}$ C	
<b>Noise</b>	- 25 dB	
<b>Shelf Life Stability</b>	100 ppm	1 year at + 25 $^{\circ}$ C

### DIMENSIONS


CASE SIZE	TERM.	L	W	T	D	E
M55342/01	B	0.050 $\pm$ 0.005	0.025 $\pm$ 0.005	0.010 to 0.030	0.010 $\pm$ 0.005	0.015 $\pm$ 0.005
M55342/02	B	0.055 $\pm$ 0.006	0.050 $\pm$ 0.005	0.012 to 0.033	0.010 $\pm$ 0.005	0.015 $\pm$ 0.005
M55342/03	B	0.105 $\pm$ 0.007	0.050 $\pm$ 0.005	0.015 to 0.033	0.015 $\pm$ 0.005	0.015 $\pm$ 0.005
M55342/04	B	0.155 $\pm$ 0.007	0.050 $\pm$ 0.005	0.015 to 0.033	0.015 $\pm$ 0.005	0.015 $\pm$ 0.005
M55342/05	B	0.230 $\pm$ 0.007	0.075 $\pm$ 0.005	0.015 to 0.033	0.020 $\pm$ 0.005	0.020 $\pm$ 0.005
M55342/06	B	0.080 $\pm$ 0.006	0.050 $\pm$ 0.005	0.015 to 0.033	0.016 $\pm$ 0.008	0.015 $\pm$ 0.005
M55342/07	B	0.126 $\pm$ 0.008	0.063 $\pm$ 0.005	0.015 to 0.033	0.020 + 0.005, - 0.010	0.020 + 0.005, - 0.010
M55342/08	B	0.209 $\pm$ 0.009	0.098 $\pm$ 0.005	0.015 to 0.033	0.020 $\pm$ 0.005	0.020 $\pm$ 0.005
M55342/09	B	0.259 $\pm$ 0.009	0.124 $\pm$ 0.005	0.015 to 0.033	0.020 $\pm$ 0.005	0.020 $\pm$ 0.005
M55342/10	B	0.105 $\pm$ 0.007	0.100 $\pm$ 0.005	0.015 to 0.033	0.015 $\pm$ 0.005	0.015 $\pm$ 0.005
M55342/11	B	0.040 $\pm$ 0.005	0.025 $\pm$ 0.005	0.010 to 0.030	0.010 $\pm$ 0.005	0.015 $\pm$ 0.005
M55342/12	B	0.064 $\pm$ 0.006	0.032 $\pm$ 0.005	0.010 to 0.033	0.012 $\pm$ 0.005	0.015 $\pm$ 0.005



QPL MIL-PRF-55342 Qualified Thin Film Resistor Chips

Vishay Thin Film

**DIMENSIONS** (continued)

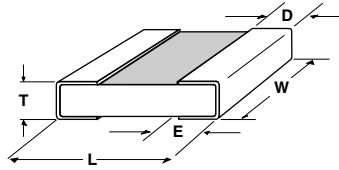

CASE SIZE	MAX. WORKING VOLTAGE	POWER RATING (mW)		RES. RANGE ( $\Omega$ ) BY CHARACTERISTICS TOLERANCE		
		CHARACTERISTIC		CHARACTERISTIC		
		E & H	K	E, H, K (0.1 %)	E (1 %, 2 %, 5 %, 10 %)	H, K (1 %, 2 %, 5 %, 10 %)
M55342/01	40	10	20	100 - 130K	59 - 130K	59 - 130K
M55342/02	40	25	50	100 - 301K	49.9 - 301K	20 - 301K
M55342/03	40	50	100	100 - 649K	49.9 - 649K	10 - 649K
M55342/04	40	100	150	100 - 1M	49.9 - 1M	10 - 1M
M55342/05	40	200	225	100 - 1.75M	49.9 - 1.75M	10 - 1.75M
M55342/06	50	50	100	100 - 475K	49.9 - 475K	10 - 475K
M55342/07	100	125	250	100 - 1M	49.9 - 1M	10 - 1M
M55342/08	150	400	800	100 - 2M	49.9 - 2M	10 - 2M
M55342/09	200	500	1000	100 - 3M	49.9 - 3M	10 - 3M
M55342/10	75	250	500	100 - 1M	49.9 - 1M	49.9 - 1M
M55342/11	25	40	40	100 - 71.5K	59 - 71.5K	59 - 71.5K
M55342/12	50	70	70	100 - 160K	49.9 - 160K	20 - 160K

ENVIRONMENTAL TESTS		
TEST	MIL-PRF-55342 LIMITS ( $\Delta R \pm$ )	VISHAY PERFORMANCE ( $\Delta R \pm$ )
Thermal Shock	0.1 %	0.020 %
Low Temperature Operation	0.1 %	0.025 %
Short Time Overload	0.1 %	0.050 %
High Temperature Exposure	0.1 %	0.009 %
Resistance to Bonding	0.2 %	0.006 %
Moisture Resistance	0.2 %	0.004 %
TCR	$\pm 25$ ppm/ $^{\circ}$ C	$< 15$ ppm/ $^{\circ}$ C
Life (2000 hrs at + 70 $^{\circ}$ C)	0.5 %	0.0184 %
Life (10 000 hrs at + 70 $^{\circ}$ C)	2.0 %	0.04 %

MECHANICAL SPECIFICATIONS	
Resistive Element	Tamelox
Substrate Material	Alumina
Chip Terminations	Gold over Nickel
Plating	SN 60/40

**FSCM CAGE # - 57489**

GLOBAL PART NUMBER INFORMATION						
New Global Part Numbering: M55342E06B1C00RTS (preferred part number format)						
M	5	5	3	4	2	E 0 6 B 1 C 0 0 R T S
GLOBAL MODEL	TCR CHARACTERISTIC	CASE SIZE	TERMINATION	OHMIC VALUE	FAILURE RATE	PACKAGING
M55342 or D55342 (/ 07 size only)	E = 25 ppm/ $^{\circ}$ C > 100 $\Omega$  H = 50 ppm/ $^{\circ}$ C  K = 100 ppm/ $^{\circ}$ C	01 = 0502 02 = 0505 03 = 1005 04 = 1505 05 = 2208 06 = 0705 07 = 1206 08 = 2010 09 = 2512 10 = 1010 11 = 0402 12 = 0603	B = solderable	Three digits and a letter. Letter identifies tolerance, acts as multiplier and decimal locator.  Tolerance      Multiplier 0.1 %      A      1 k $\Omega$ 1 M $\Omega$ 1 %      D      E      F 2 %      G      H      T 5 %      J      K      L 10 %      M      N      P	M = 1.0 % per 1000 hrs. P = 0.1 % per 1000 hrs. R = 0.01 % per 1000 hrs. C = non ER version	BS = BULK 100 Min 1 Mult WS = WAFFLE 100 Min 1 Mult TAPE AND REEL T0 = 100 Min 100 Mult T1 = 1000 Min 1000 Mult T3 = 300 Min 300 Mult T5 = 500 Min 500 Mult TF = Full Reel 2500 TS = 100 Min 1 Mult
Historical Part Number example: M55342K06B5E60R (will continue to be accepted)						
M55342	K	06	B	5E60	R	
SERIES	TCR CHARACTERISTIC	CASE SIZE	TERMINATION	VALUE AND TOLERANCE	FAILURE RATE	

SURFACE MOUNT CHIPS



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.