

PRODUCT SPECIFICATION

| | | |
|----------------------------|--------------------------------|--------------|
| COSMO ELECTRONICS CORP. | Photocoupler : K1010 | SHEET 1 OF 5 |
|----------------------------|--------------------------------|--------------|

High Reliability Photocoupler

• Features

1. Current transfer ratio
(CTR : MIN. 50% at $I_F=5\text{mA}$ $V_{ce}=5\text{V}$)
2. High isolation voltage between input and output ($V_{iso} : 5000\text{VRms}$).
3. Compact dual-in-line package.

Searchdatasheet.com


• Applications

1. Registers, copiers, automatic vending machines.
2. System appliances, measuring instruments.
3. Computer terminals, programmable controllers.
4. Communications, telephone, etc.
5. Electric home appliances, such as oil fan heaters, Microwave oven, Washer, Refrigerator, Air conditioner, etc.
6. Medical instruments, physical and chemical equipment.
7. Signal transmission between circuits of different potentials and impedances.
8. Facsimile equipment, Audio, Video.
9. Switching power supply, Laser beam printer.

PRODUCT SPECIFICATION


| | | |
|-----------------------------------|--------------------------------|--------------|
| COSMO ELECTRONICS CORP. | Photocoupler : K1010 | SHEET 2 OF 5 |
|-----------------------------------|--------------------------------|--------------|

1. OUTSIDE DIMENSION : UNIT (mm)

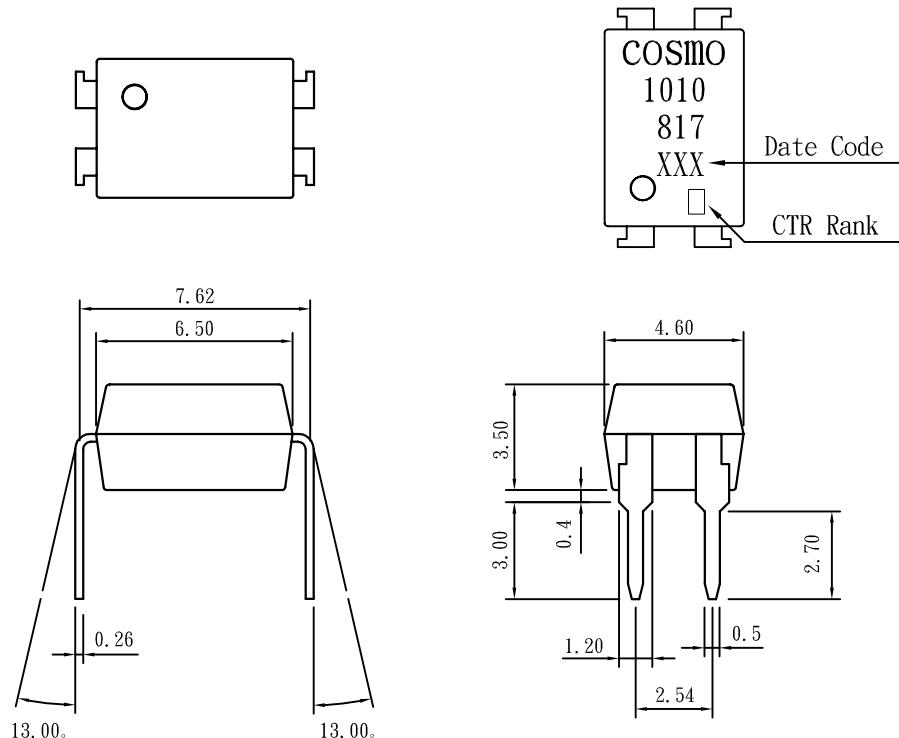

TOLERANCE : $\pm 0.2\text{mm}$

2. SCHEMATIC : TOP VIEW

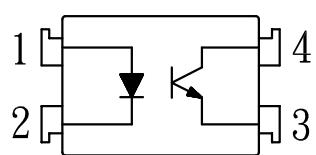

1. Anode
2. Cathode
3. Emitter
4. Collector

PRODUCT SPECIFICATION

| | | |
|-----------------------------------|--------------------------------|---------------------|
| COSMO ELECTRONICS CORP. | Photocoupler : K1010 | SHEET 3 OF 5 |
|-----------------------------------|--------------------------------|---------------------|

● Absolute Maximum Ratings

(Ta=25°C)


| Parameter | | Symbol | Rating | Unit |
|---------------------------------|-----------------------------|------------------|-------------|------------------|
| Input | Forward current | I _F | 50 | mA |
| | Peak forward current | I _{FM} | 1 | A |
| | Reverse voltage | V _R | 6 | V |
| | Power dissipation | P _D | 70 | mW |
| Output | Collector-emitter voltage | V _{CEO} | 60 | V |
| | Emitter-collector voltage | V _{ECO} | 6 | V |
| | Collector current | I _c | 50 | mA |
| | Collector power dissipation | P _c | 150 | mW |
| Total power dissipation | | P _{tot} | 200 | mW |
| Isolation voltage 1 minute | | V _{iso} | 5000 | V _{rms} |
| Operating temperature | | T _{opr} | -30 to +100 | ° C |
| Storage temperature | | T _{stg} | -55 to +125 | ° C |
| Soldering temperature 10 second | | T _{sol} | 260 | ° C |

● Electro-optical Characteristics

(Ta=25°C)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------------|--------------------------------------|----------------------|--|--------------------|------------------|------|------|
| Input | Forward voltage | V _F | I _F =20mA | - | 1.2 | 1.4 | V |
| | Peak forward voltage | V _{FM} | I _F =0.5A | - | - | 3.0 | V |
| | Reverse current | I _R | V _R =4V | - | - | 10 | uA |
| | Terminal capacitance | C _t | V=0, f=1kHz | - | 30 | - | pF |
| Output | Collector dark current | I _{CEO} | V _{CE} =20V | - | - | 0.1 | uA |
| Transfer characteristics | Current transfer ratio | CTR | I _F =5mA, V _{CE} =5V | 50 | - | 600 | % |
| | Collector-emitter saturation voltage | V _{CE(sat)} | I _F =20mA, I _c =1mA | - | 0.1 | 0.2 | V |
| | Isolation resistance | R _{iso} | DC500V | 5x10 ¹⁰ | 10 ¹¹ | - | ohm |
| | Floating capacitance | C _f | V=0, f=1MHz | - | 0.6 | 1.0 | pF |
| | Cut-off frequency | f _c | V _{CC} =5V, I _c =2mA, R _L =100ohm | - | 80 | - | kHz |
| | Response time (Rise) | t _r | V _{CC} =2V, I _c =2mA, R _L =100ohm | - | 4 | 18 | us |
| | Response time (Fall) | t _f | | - | 3 | 18 | us |

Fig. 1 Current Transfer Ratio
vs. Forward Current

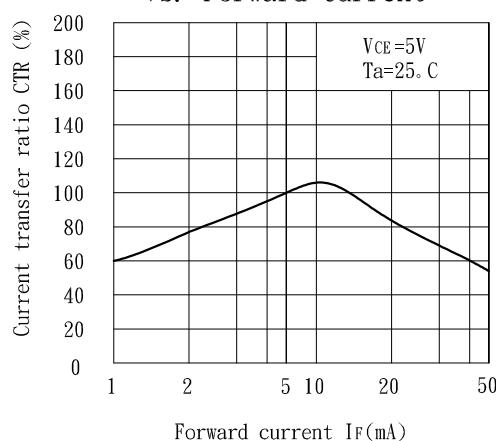

Classification table of current transfer ratio is shown below.

| Model NO. | CTR (%) |
|-----------|------------|
| K1010 A | 80 TO 160 |
| K1010 B | 130 TO 260 |
| K1010 C | 200 TO 400 |
| K1010 D | 300 TO 600 |
| K1010 E | 50 TO 600 |

PRODUCT SPECIFICATION

COSMO
ELECTRONICS CORP.

Photocoupler :
K1010

SHEET 4 OF 5

Fig. 2 Collector Power Dissipation vs. Ambient Temperature

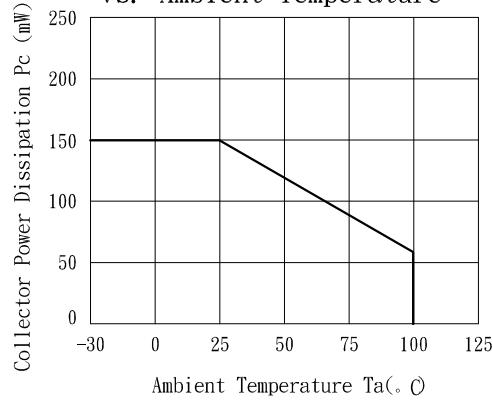


Fig. 4 Forward Current vs. Ambient Temperature

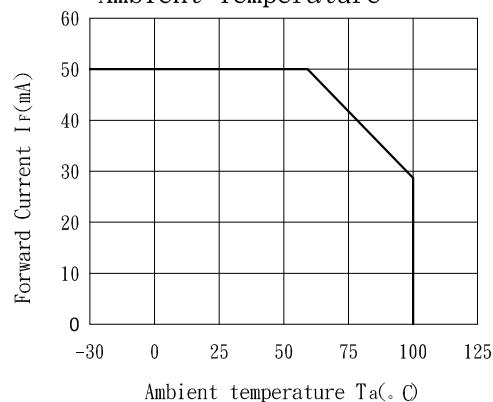


Fig. 6 Collector Current vs. Collector-emitter Voltage

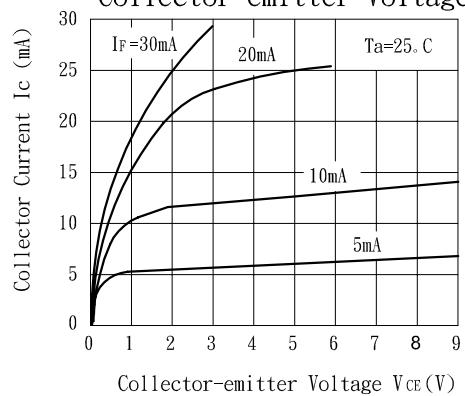


Fig. 3 Collector Dark Current vs. Ambient Temperature

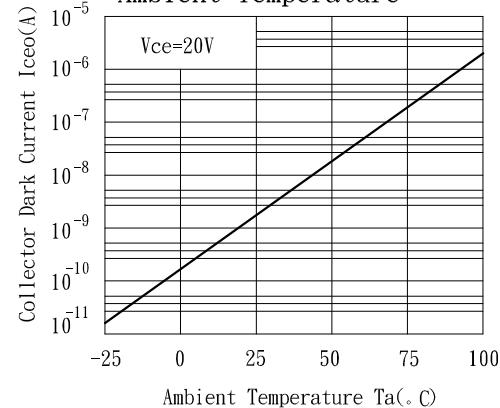


Fig. 5 Forward Current vs. Forward Voltage


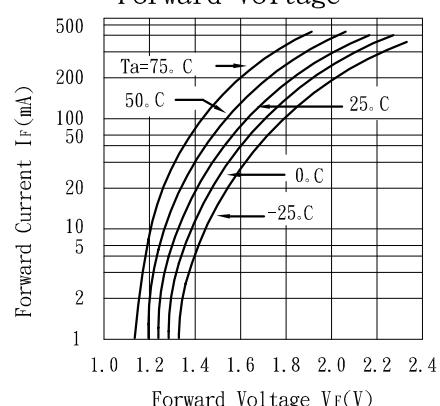


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

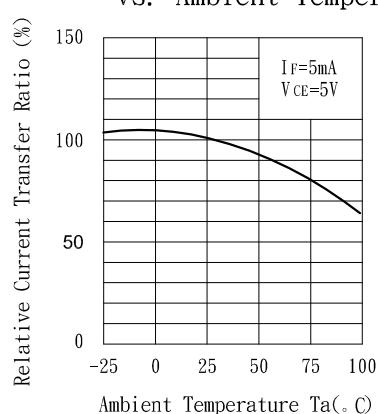

PRODUCT SPECIFICATION

COSMO
ELECTRONICS CORP.

Photocoupler :
K1010

SHEET 5 OF 5

Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature

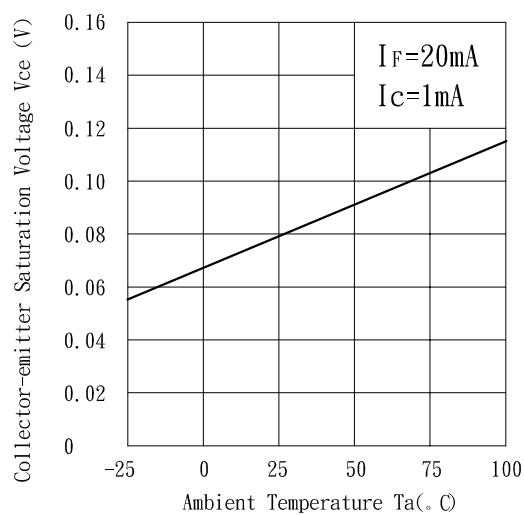


Fig. 9 Collector-emitter Saturation Voltage vs. Forward Current

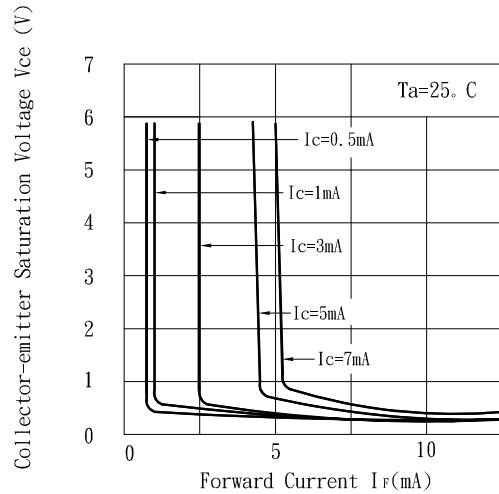


Fig. 10 Response Time vs. Load Resistance

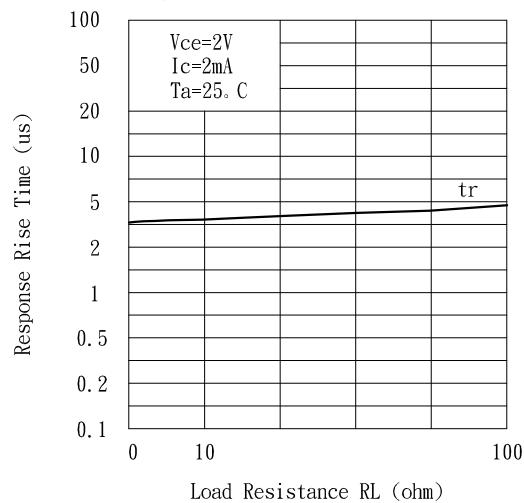


Fig. 11 Response Time vs. Load Resistance

