



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1447	A	RELEASED	HO	5/19/04	SF	8/10/04	JC	8/10/04
1885	B	UPDATED TO ROHS COMPLIANCE	EO	02/03/06	HO	2/6/06	HO	2/6/06


**Description:** Switchmode series TO-220 NPN Silicon Power Transistor. The MJE13005 transistor is designed for high voltage, high speed, Power switching in inductive circuits. They are particularly suited for 115-220V switch-mode applications.

Features:

- Switching regulators
- DC-DC convertors
- Inverters
- Solenoid and relay drivers
- Motor controls

**Absolute Maximum Ratings:**

- Collector-Emitter Voltage,  $V_{CEV} = 700V$
- Collector-Base Voltage,  $V_{CBO} = 400V$
- Emitter-Base Voltage,  $V_{EBO} = 9V$
- Continuous Collector Current,  $I_C = 4A$
- Base Current,  $I_B = 2A$
- Total Device Dissipation ( $T_C = +25^\circ C$ ),  $P_D = 75W$   
Derate above  $25^\circ C = 0.6W/^\circ C$
- Operating Junction Temperature Range,  $T_J = -65^\circ C$  to  $+150^\circ C$
- Storage Temperature Range,  $T_{stg} = -65^\circ C$  to  $+150^\circ C$

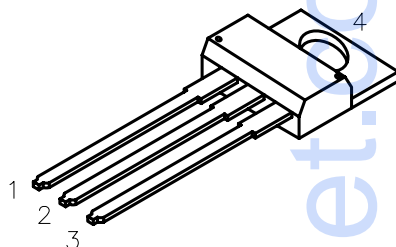

**Pin Configuration:**

1. Base
2. Collector
3. Emitter
4. Collector





**Electrical Characteristics: ( $T_A = +25^\circ C$  unless otherwise specified)**

Parameter	Symbol	Test Conditions	Min	Max	Unit
<b>OFF Characteristics</b>					
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 10mA, I_B = 0$	400	-	V
Collector Cut-Off Current	$I_{CEV}$	$V_{CE} = 700V, V_{EB(off)} = 1.5V$	-	1	mA
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB} = 9V, I_C = 0$	-	1	mA
<b>ON Characteristics</b>					
DC Current Gain, Note 1	$h_{FE}$	$V_{CE} = 5V, I_C = 1A$	10	60	-
		$V_{CE} = 5V, I_C = 2A$	8	40	-
Collector-Emitter Saturation Voltage Note 1	$V_{CE(sat)}$	$I_C = 1A, I_B = 200mA$	-	0.5	V
		$I_C = 2A, I_B = 500mA$	-	0.6	V
Base-Emitter Saturation Voltage Note 1	$V_{BE(sat)}$	$I_C = 1A, I_B = 200mA$	-	1.2	V
		$I_C = 2A, I_B = 500mA$	-	1.6	V
Current Gain-Bandwidth Product	$f_T$	$V_{CE} = 10V, I_C = 500mA, f = 1MHz$	4	-	MHz

**Small-Signal Characteristics**

Delay Time	$t_d$	$V_{CC} = 125V, I_C = 2A, I_{B1} = I_{B2} = 0.4A$	-	0.1	$\mu s$
Rise Time	$t_r$		-	0.7	
Storage Time	$t_s$	$V_{CC} = 125V, I_C = 2A, I_{B1} = I_{B2} = 0.4A$	-	4	
Fall Time	$t_f$		-	0.9	

Note 1: Pulse test: Pulse width  $\leq 300\mu s$ , Duty cycle  $\leq 2\%$ .

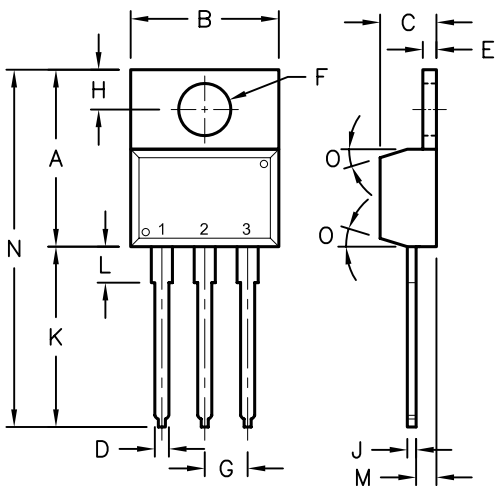

Dimensions	A	B	C	D	E	F	G	H	J	K	L	M	N	O
<b>Max.</b>	16.51	10.67	4.83	0.90	1.40	3.88	2.79	3.43	0.56	14.73	4.07	2.92	31.24	-
<b>Min.</b>	14.42	9.63	3.65	-	1.15	3.75	2.29	2.54	-	12.70	2.80	2.03	-	7'

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
HISHAM ODISH	5/19/04
CHECKED BY:	DATE:
Steve Feiwell	8/10/04
APPROVED BY:	DATE:
JOHN COLE	8/10/04

DRAWING TITLE:

Transistor, Power, Silicon, TO-220, NPN

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	MJE13005	01H0840.DWG	B
SCALE: NTS	U.O.M.: Millimeters	SHEET: 1 OF 1	