


CERAMIC FILTER FOR TV/VTR

电视机/录像机用陶瓷滤波器

LT/LTH SERIES

DIMENSIONS(mm) 外形尺寸

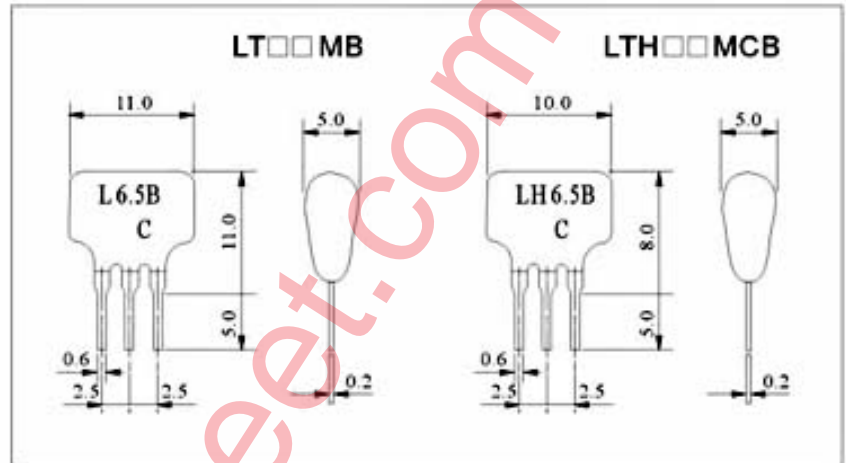


PRINCIPAL PARAMETERS 主要参数

Model 型号	3dB Band Width 3分贝带宽 (KHz)min	20dB Band Width 20分贝带宽 (KHz) max	Insertion Loss 插入损耗 (dB)max	Stop Band Att 阻带防卫度 (dB)min	In/Output Impedance 输入/输出阻抗 (Ω)
LT4.5MB	±60	530	6	20(4.5 ^{+0.8} _{-1.0} MHz内)	1K
LT5.5MB	±75	550	6	25(5.5±1MHz内)	600
LT6.0MB	±80	600	6	25(6.0±1MHz内)	470
LT6.5MB	±80	630	6	25(6.5±1MHz内)	470
LTH4.5MCB	±60	600	6	30(0±4.5MHz内)	1K
LTH5.5MCB	±60	600	6	30(0±5.5MHz内)	600
LTH6.0MCB	±60	600	6	30(0±6.0MHz内)	470
LTH6.5MCB	±70	650	6	30(0±6.5MHz内)	470

TEST CIRCUIT 测量线路

LT.LTH

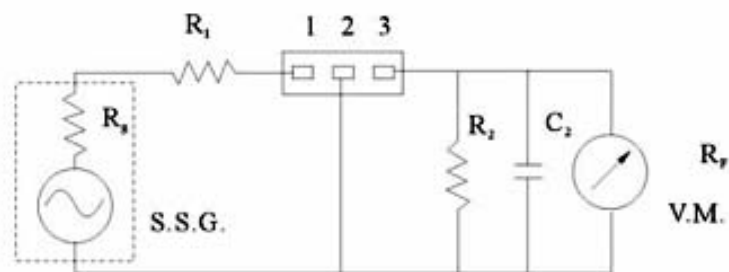

$R_1 + R_2 = R_i$ (Input/output Impedance)
 (Include stray capacitance and input capacitance of RF V.M.)
 $C = 10\text{pF}$ (包括杂散电容和射频电压表输入电容)

[Click here to enlarge the photo](#)