

$$I_{F(AV)} = 3.0\text{Amp}$$

$$V_R = 40\text{V}$$

**Major Ratings and Characteristics**

| Characteristics                           | 30BQ040     | Units            |
|---|-------------|------------------|
| $I_{F(AV)}$ Rectangular waveform          | 3.0         | A                |
| $V_{RRM}$                                 | 40          | V                |
| $I_{FSM}$ @ $t_p=5\mu\text{s}$ sine       | 2000        | A                |
| $V_F$ @ 3.0Apk, $T_J = 125^\circ\text{C}$ | 0.43        | V                |
| $T_J$ range                               | - 55 to 150 | $^\circ\text{C}$ |

**Description/ Features**

The 30BQ040 surface-mount Schottky rectifier has been designed for applications requiring low forward drop and small foot prints on PC boards. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- Small foot print, surface mountable
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

**Case Styles**

30BQ040



SMC



### Voltage Ratings

| Part number  | 30BQ040 |
|--|---------|
| V <sub>R</sub> Max. DC Reverse Voltage (V)             | 40      |
| V <sub>RWM</sub> Max. Working Peak Reverse Voltage (V) |         |

### Absolute Maximum Ratings

| Parameters  | 30BQ | Units | Conditions  |
|---|------|-------|---|
| I <sub>F(AV)</sub> Max. Average Forward Current                   | 3.0  | A     | 50% duty cycle @ T <sub>L</sub> = 118 °C, rectangular wave form   |
|   | 4.0  |       | 50% duty cycle @ T <sub>L</sub> = 110 °C, rectangular wave form   |
| I <sub>FSM</sub> Max. Peak One Cycle Non-Repetitive Surge Current | 2000 | A     | 5µs Sine or 3µs Rect. pulse   |
|   | 110  |       | 10ms Sine or 6ms Rect. pulse  |
| E <sub>AS</sub> Non Repetitive Avalanche Energy                   | 6.0  | mJ    | T <sub>J</sub> = 25 °C, I <sub>AS</sub> = 1.0A, L = 12mH  |
| I <sub>AR</sub> Repetitive Avalanche Current                      | 1.0  | A     | Current decaying linearly to zero in 1 µsec<br>Frequency limited by T <sub>J</sub> max. Va = 1.5 x Vr typical |

### Electrical Specifications

| Parameters                                       | 30BQ  | Units | Conditions  |
|--|-------|-------|---|
| V <sub>FM</sub> Max. Forward Voltage Drop (1)    | 0.53  | V     | @ 3A T <sub>J</sub> = 25 °C   |
|  | 0.68  | V     | @ 6A  |
|  | 0.43  | V     | @ 3A T <sub>J</sub> = 125 °C  |
|  | 0.57  | V     | @ 6A  |
| I <sub>RM</sub> Max. Reverse Leakage Current (1) | 0.5   | mA    | T <sub>J</sub> = 25 °C V <sub>R</sub> = rated V <sub>R</sub>              |
|  | 30    | mA    | T <sub>J</sub> = 125 °C   |
| C <sub>T</sub> Max. Junction Capacitance         | 230   | pF    | V <sub>R</sub> = 5V <sub>DC</sub> (test signal range 100KHz to 1Mhz) 25°C |
| L <sub>S</sub> Typical Series Inductance         | 3.0   | nH    | Measured lead to lead 5mm from package body                               |
| dv/dt Max. Voltage Rate of Change                | 10000 | V/µs  | (Rated V <sub>R</sub> )   |

(1) Pulse Width < 300µs, Duty Cycle < 2%

### Thermal-Mechanical Specifications

| Parameters  | 30BQ         | Units   | Conditions          |
|---|--------------|---------|---------------------|
| T <sub>J</sub> Max. Junction Temperature Range (*)              | -55 to 150   | °C      |                     |
| T <sub>stg</sub> Max. Storage Temperature Range                 | -55 to 150   | °C      |                     |
| R <sub>thJL</sub> Max. Thermal Resistance Junction to Lead (**) | 12           | °C/W    | DC operation        |
| R <sub>thJA</sub> Max. Thermal Resistance Junction to Ambient   | 46           | °C/W    | DC operation        |
| wt Approximate Weight   | 0.24 (0.008) | g (oz.) |                     |
| Case Style  | SMC          |         | Similar to DO-214AB |
| Device Marking  | IR3F         |         |                     |

(\*)  $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

(\*\*) Mounted 1 inch square PCB

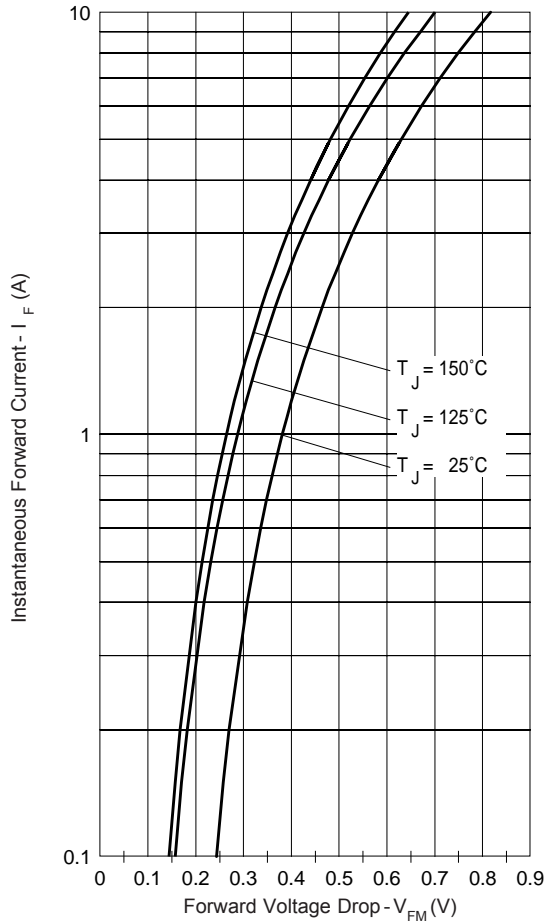


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

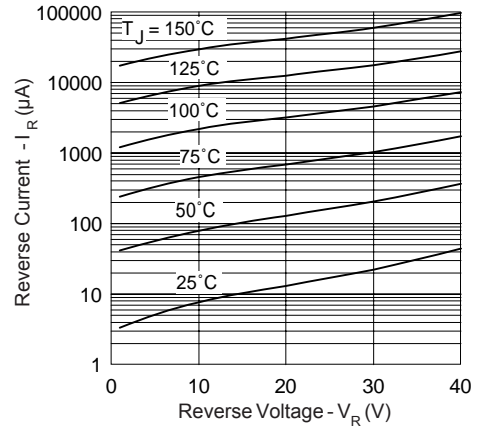


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

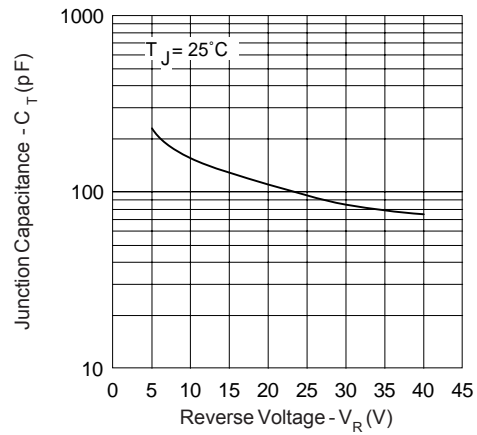


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

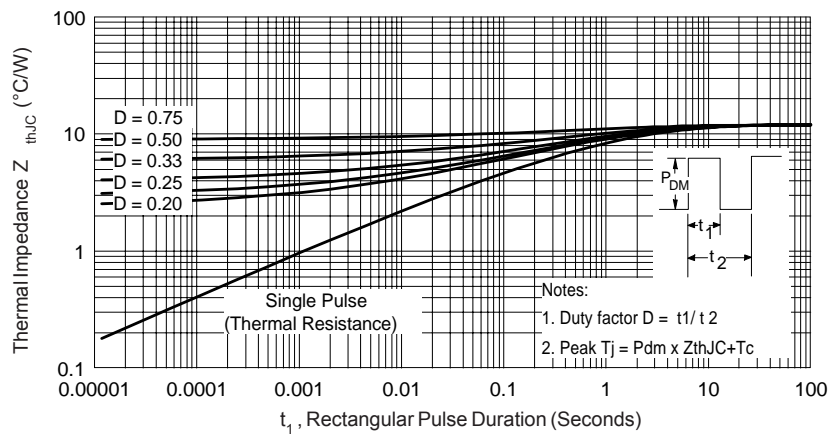


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

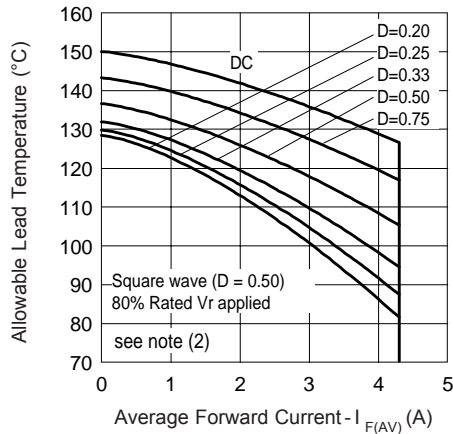


Fig. 4 - Maximum Average Forward Current Vs. Allowable Lead Temperature

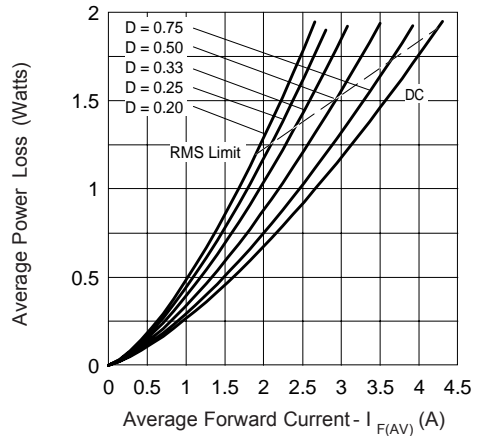


Fig. 5 - Maximum Average Forward Dissipation Vs. Average Forward Current

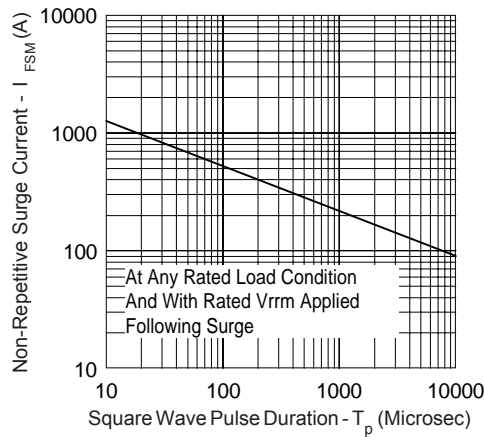



Fig. 6 - Maximum Peak Surge Forward Current Vs. Pulse Duration

(2) Formula used:  $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$ ;


$Pd$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$Pd_{REV}$  = Inverse Power Loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = 80\%$  rated  $V_R$


Outline Table

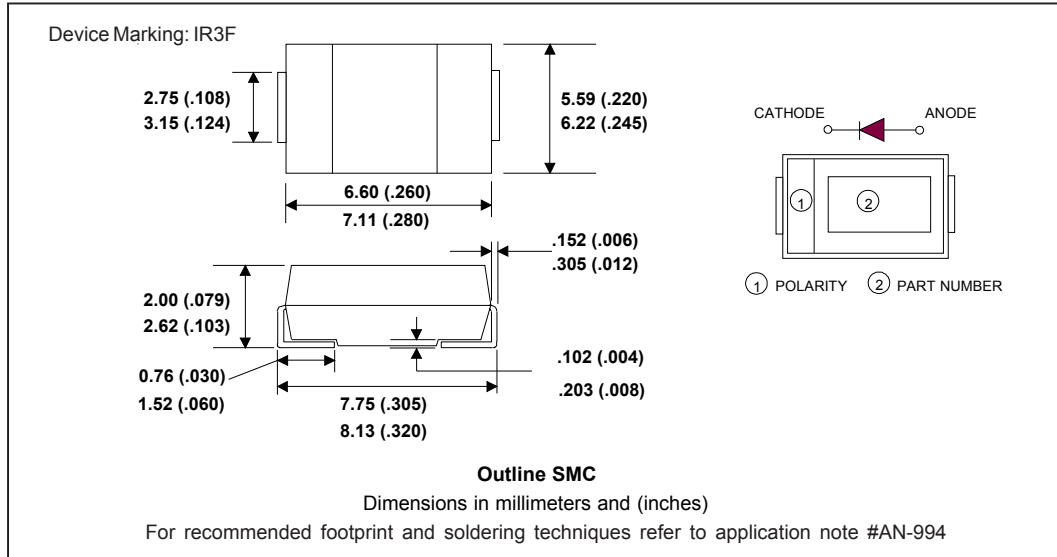

Marking & Identification

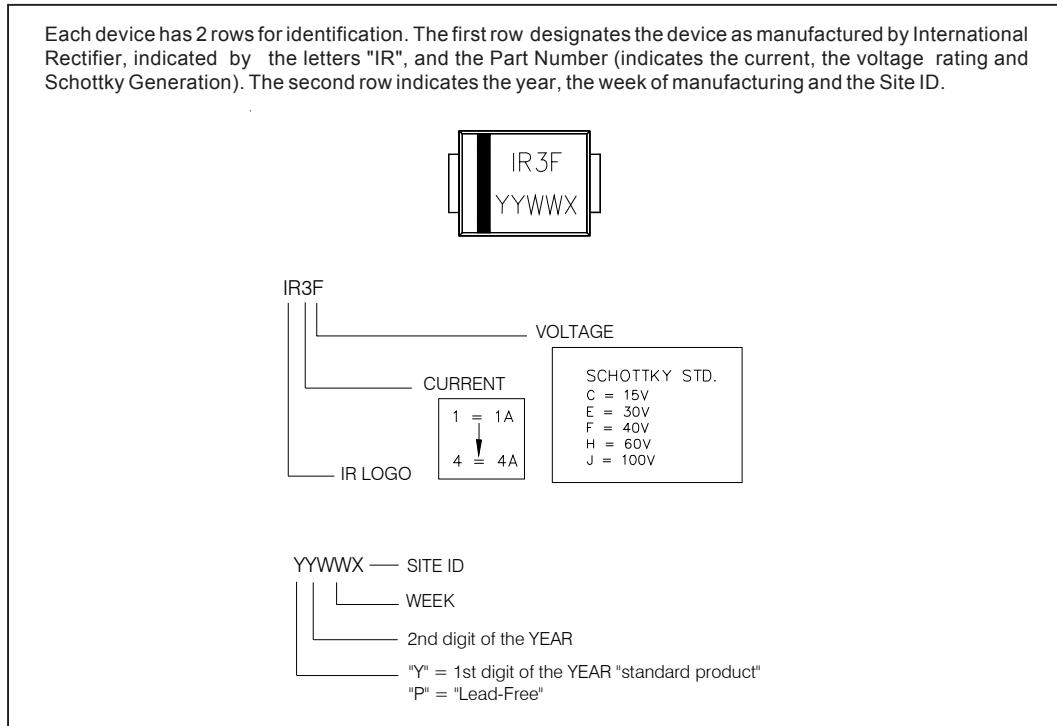

Tape & Reel Information

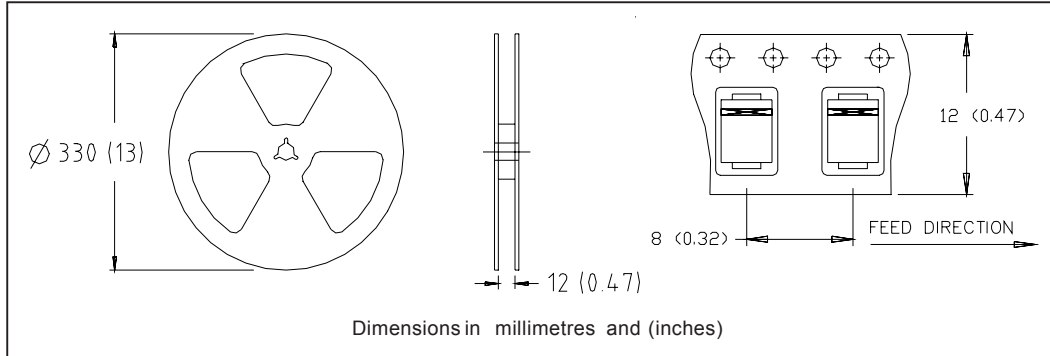

Ordering Information Table

| Device Code | 30       | B | Q                            | 040      | TR | -                                |
|-------------|----------|---|------------------------------|----------|----|----------------------------------|
|             | 1        | 2 | 3                            | 4        | 5  | 6                                |
|             | <b>1</b> | - | Current Rating               | <b>2</b> | -  | B = Single Lead Diode            |
|             | <b>3</b> | - | Q = Schottky Q Series        | <b>4</b> | -  | Voltage Rating (040 = 40V)       |
|             | <b>5</b> | - | • none = Box (1000 pieces)   | <b>6</b> | -  | • TR = Tape & Reel (3000 pieces) |
|             | <b>6</b> | - | • none = Standard Production |          | -  | • PbF = Lead-Free                |

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level.  
 Qualification Standards can be found on IR's Web site.