




DF005S thru DF10S

Miniature Glass Passivated Single-Phase Surface Mount Bridge Rectifiers
Voltage Range 50 to 1000 Volts Forward Current 1.0 Ampere

Features


- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ High surge overload rating of 50 Amperes peak
- ◆ Ideal for printed circuit boards
- ◆ High temperature soldering guaranteed:
260°C/10 seconds at 5 lbs. (2.3kg) tension



DFS

Mechanical Data

- ◆ Case: Molded plastic body over passivated junctions
- ◆ Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- ◆ Polarity: Polarity symbols marked on body
- ◆ Mounting Position: Any
- ◆ Weight: 0.04oz., 1.0g

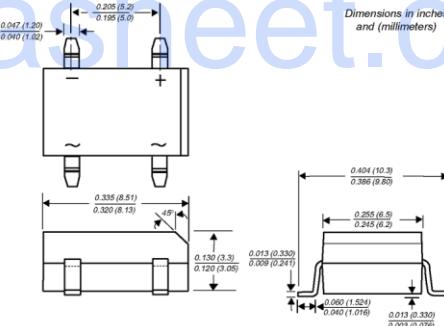

Maximum Ratings and Electrical Characteristics

(T_A=25°C unless otherwise noted)

Parameter	Symbols	DF005S	DF01S	DF02S	DF04S	DF06S	DF08S	DF10S	Units
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward output rectified current at T _A =40°C (Note 2)	I _{F(AV)}								Amp
Peak forward surge current single half sine-wave superimposed on rated load (JEDEC Method) T _J =150°C	I _{FSM}								Amps
Rating for fusing (t < 8.3ms)	Pt								A ² sec
Max. instantaneous forward voltage drop per leg at 1.0A	V _F								Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage per leg T _A =125°C	I _R								uA
Typical junction capacitance per leg (Note 1)	C _J								pF
Typical thermal resistance per leg (Note 2)	R _{θJA} R _{θIL}								°C/W
Operating junction and storage temperature range	T _J , T _{STG}						-55 to +150		°C

Notes:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
2. Units mounted on P.C.B. with 0.51 x 0.51" (13 x 13mm) copper pads

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 - Derating Curve Output Rectified Current

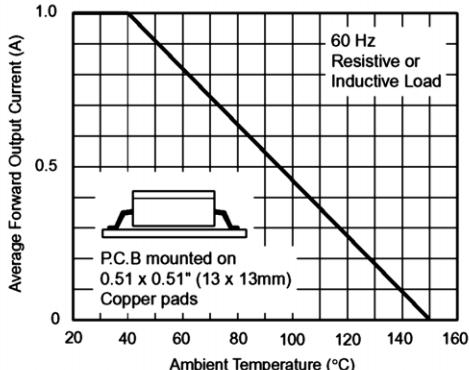


Fig. 3 - Typical Forward Characteristics Per Leg

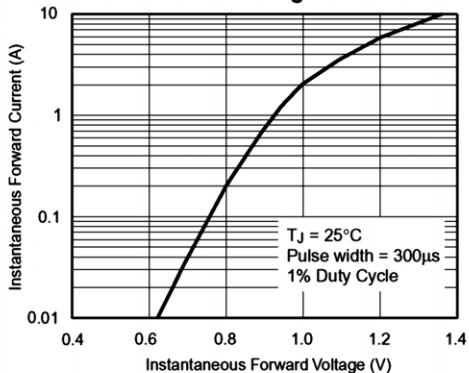


Fig. 5 - Typical Junction Capacitance Per Leg

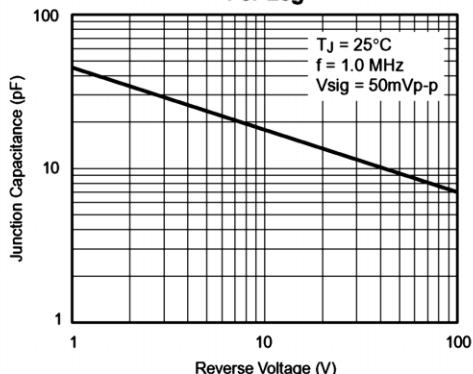


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Leg

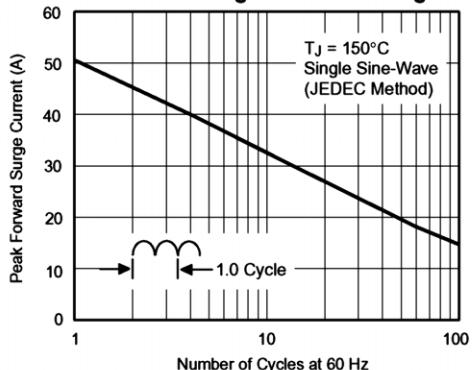


Fig. 4 - Typical Reverse Leakage Characteristics Per Leg

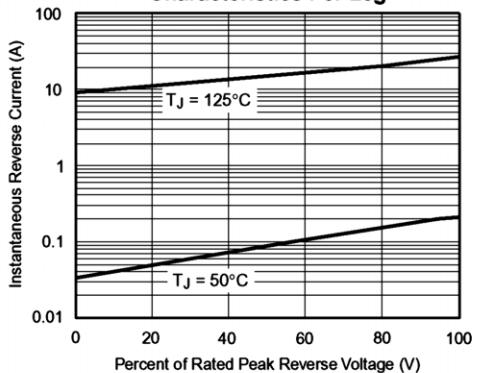


Fig. 6 - Typical Transient Thermal Impedance

